



Celotex TD4000

Flat Roof Insulation Board

Celotex
SAINT-GOBAIN


Introduction

Celotex TD4000 provides a quick and easy way to achieve effective thermally insulated flat roof decks for building structures such as small extensions or garage roofs where there will only be occasional trafficking.

TD4000 is 5.5mm WBP exterior grade plywood bonded to rigid polyisocyanurate foam board, manufactured using a blowing agent that has zero ozone depletion potential (ODP) and a low global warming potential (GWP).

With Celotex TD4000 you are specifying an insulation board that:

- Is ideal for use in occasionally trafficked applications
- Is a three-in-one product to provide deck, vapour control layer and insulation
- Provides warm roof construction due to over joist installation
- Is rapidly installed and weatherproofed
- Accepts a wide variety of weathering systems
- Provides reliable long term energy savings for buildings
- Future proofs the energy performance of new and existing buildings

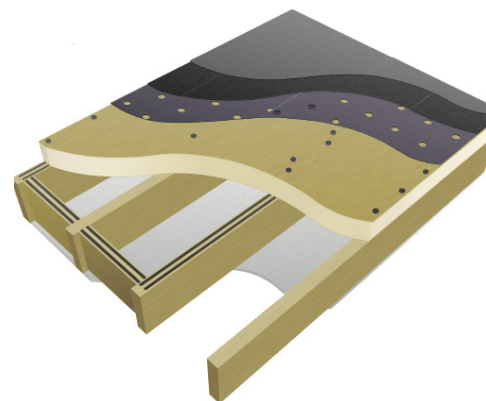

Celotex TD4000 in an insulated deck application

Applications

Celotex TD4000 is purpose designed for use in light traffic flat roof applications.

Specification Clause

The insulation shall be Celotex TD4000 _____mm thick comprising a polyisocyanurate rigid foam insulation core with a thermal conductivity of 0.022 W/mK with low emissivity aluminium foil facings on both sides bonded to a layer of 5.5mm WBP plywood. Celotex TD4000 is CFC/HCFC free with zero ODP and low GWP and CE marking compliance to BS EN 13165. Celotex TD4000 is manufactured in accordance with BS EN 13165, quality management system ISO 9001 and environmental management system ISO 14001. All products must be installed in accordance with instructions issued by Celotex.

Celotex TD4000 Technical Data

Product Code	Thickness (mm)	R-value (m ² K/W)	Weight (kg/m ²)
TD4096	96	4.10	6.46
TD4106*	106	4.55	6.97
TD4116*	116	5.00	7.28
TD4126	126	5.45	7.58

*Not available from stock. Minimum order quantity and extended lead time applies. Please contact Celotex Customer Service - 01473 820820

Sustainable Insulation

Celotex PIR insulation has been independently assessed by BRE Global and has been accredited with an A+ rating when compared to the BRE Green Guide.

The results also show that Celotex offers a lower environmental impact than other typical PIR manufacturers.

For further information about Celotex' sustainable insulation solutions, visit the sustainability pages of the website at celotex.co.uk



cont...



Celotex TD4000

Flat Roof Insulation Board

Celotex
SAINT-GOBAIN

Physical Properties

	Method	TD4000
Compressive strength*	BS EN 826	≥140kPa
Dimensional stability*	BS EN 1604	DS(TH)8
Water vapour resistance*	BS EN 12086	>150 MNs/g
Thermal conductivity*	BS EN 12667	0.022 W/mK

Typical U-values

U-values will vary depending on application. To calculate a specific U-value, please visit our online U-value calculator at celotex.co.uk

Installation Guidelines

For full details of the Installation of Celotex TD4000, please refer to the 'applications' pages of the website at celotex.co.uk.

Further Information

If you wish to contact Celotex, please visit celotex.co.uk and click on the 'contact us' page.

For information regarding [storage](#), [installation and handling](#) of Celotex products, or for Health & Safety advice, please refer to the 'literature' pages of the website at celotex.co.uk.

Celotex has a policy of continuous product development and reserves the right to alter product designs or specifications without prior notice.

Celotex Limited
Lady Lane Industrial Estate,
Hadleigh, Ipswich
Suffolk IP7 6BA

T: 01473 820850
W: celotex.co.uk